


## 3.0 Heat Shrinkable Tubing and Braided Sleeving

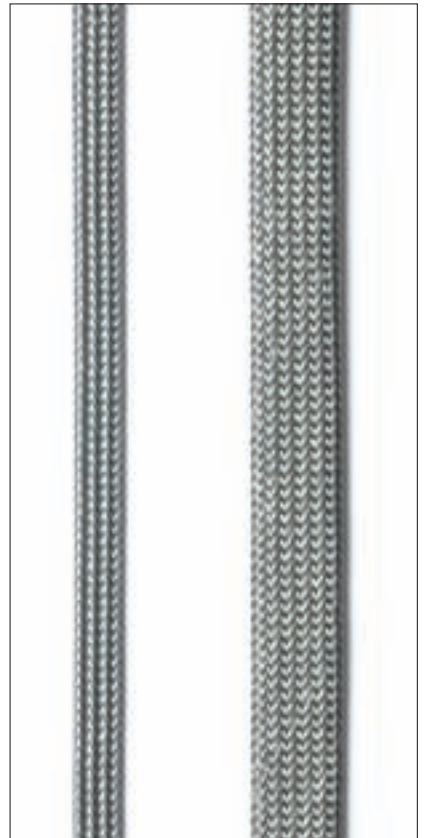

# Heat Shrinkable Tubing and Braided Sleeving.

For secure bundling of cables and wiring in applications, where the movement of engine components or high temperatures are a key factor. Protective sleeving provides resistance to heat and abrasion as well as isolation.

## 3.1 Heat Shrinkable Tubing

TCN20.....	118
TCN20 overexpanded.....	119
EPS-300, EPS-400.....	120
TFE2, TFE4.....	121

## 3.2 Braided Sleeving

Helagaine HEGP and HEGPX Braided Sleeving.....	122
Helagaine HEGPVO and HEGPVOX Braided Sleeving .....	123
Helagaine HEGPA66 Braided Sleeving .....	124
Helagaine HEGSAS Braided Sleeving .....	125
Helagaine HEGEMIP and HEGEMIPVO Braided Sleeving.....	126
Helagaine HEGPL Braided Sleeving .....	128
Helahook Re-Sealable Protective Sleeving.....	129

## TCN20

### Features and Benefits

TCN20 is a general purpose, flame-retardant polyolefin tubing with good resistance to common fluids and solvents. This flexible, 2:1 shrink ratio tubing has an excellent physical and electrical performance. The low shrink temperature and the mechanical strength make this tubing being widely used in the electrical, electronics and automotive industry.


### Application

TCN20 is suitable for a wide range of applications like electrical insulations, mechanical protection, cable bundling, et cetera.



Heat shrink tubing TCN20.

Material Data	
Material	<b>Polyolefin, cross-linked (POX)</b>
Colour	<b>Black (BK)</b>
Shrink Ratio	<b>2:1</b>
Longitudinal change after shrinkage	<b>+/- 5%</b>
Min. Shrink Temperature	<b>+100 °C</b>
Operating Temperature	<b>-55 °C to +125 °C</b>
Dielectric Strength	<b>20 kV/mm according to IEC 243</b>
Flammability	<b>self-extinguishing</b>
Certification	<b>UL224</b>



TCN20

Technical Table

Article-No.	Type	Supplied Ø D min.	Recov. Ø d max.	Wall (WT) nom.	Reel Length (m)
300-73010	<b>TCN20 1,2/0,6</b>	1.2	0.6	0.30	300
300-73020	<b>TCN20 1,6/0,8</b>	1.6	0.8	0.35	300
300-73030	<b>TCN20 2,4/1,2</b>	2.4	1.2	0.45	300
300-73040	<b>TCN20 3,2/1,6</b>	3.2	1.6	0.45	300
300-73050	<b>TCN20 4,8/2,4</b>	4.8	2.4	0.50	300
300-73060	<b>TCN20 6,4/3,2</b>	6.4	3.2	0.55	300
300-73070	<b>TCN20 9,5/4,8</b>	9.5	4.7	0.55	150
300-73080	<b>TCN20 12,7/6,4</b>	12.7	6.4	0.65	100
300-73090	<b>TCN20 19,1/9,5</b>	19.1	9.5	0.80	60
300-73100	<b>TCN20 25,4/12,7</b>	25.4	12.7	0.90	60
300-73110	<b>TCN20 38,1/19,1</b>	38.0	19.0	1.02	30
300-73120	<b>TCN20 50,8/25,4</b>	50.8	25.4	1.15	30

All dimensions in mm. Subject to technical changes.



Please note! Not every product listed carries these approvals! For Product Specific Approvals please refer to the Appendix.

### TCN20 overexpanded

#### Features and Benefits

This extremely fast shrinking, thin wall tubing with its high shrink ratio of approx. 3:1 is flexible, and self-extinguishing. Its mechanical strength and resistance against chemicals and solvents make it suitable for a wide range of applications.

#### Application

Mechanical, electrical and corrosion protection applications for parts with high diameter variances. This fast shrinking tubing makes it suitable for high volume production.



Battery cables safely insulated with TCN20 overexpanded shrinkable tubing.



Due to its thin wall TCN20 overexpanded is suitable for insulation of antennas.

#### Material Data

Material	<b>Polyolefin, cross-linked (POX)</b>
Colour	<b>Black (BK)</b>
Shrink Ratio	<b>3:1</b>
Longitudinal change after shrinkage	<b>+/- 5%</b>
Min. Shrink Temperature	<b>+100 °C</b>
Operating Temperature	<b>-55 °C to +125 °C</b>
Dielectric Strength	<b>20 kV/mm</b>
Flammability	<b>self-extinguishing</b>
Certification	<b>UL224</b>



#### Technical Table

Article-No.	Type	Supplied Ø D min.	Recov. Ø d max.	Wall (WT) nom.	Reel Length (m)
300-73130	<b>TCN20 2,4/0,8</b>	2.4	0.8	0.50	300
300-73140	<b>TCN20 3,2/1,2</b>	3.2	1.2	0.50	300
300-73150	<b>TCN20 4,8/1,6</b>	4.8	1.6	0.50	300
300-73160	<b>TCN20 6,6/2,4</b>	6.6	2.4	0.55	300
300-73170	<b>TCN20 9,5/3,2</b>	9.5	3.2	0.65	150
300-73180	<b>TCN20 12,7/4,8</b>	12.7	4.8	0.75	100
300-73190	<b>TCN20 19,0/6,4</b>	19.0	6.4	0.75	60
300-73200	<b>TCN20 25,4/9,5</b>	25.4	9.5	0.79	60
300-73210	<b>TCN20 38,0/12,7</b>	38.0	12.7	0.95	30

All dimensions in mm. Subject to technical changes.



Please note! Not every product listed carries these approvals! For Product Specific Approvals please refer to the Appendix.

### EPS-300, EPS-400

#### Features and Benefits

EPS is a flexible and thin walled heat shrink tubing with a co-extruded hot melt adhesive inner wall. The adhesive flows well to provide an environmental sealing of complex parts and protect against moisture.


#### Application

EPS seals and protect a wide variety of electrical applications like back end connector sealing, connector-to-cable transitions and splices.



EPS offers high shrink ratios and protection against humidity.

**Cut lengths available on request. Please contact us!**

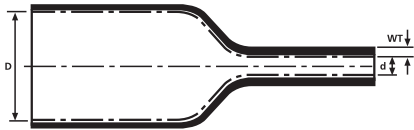

EPS-300, EPS-400

#### Material Data

Material	<b>Polyolefin, cross-linked (POX)</b>
Colour	<b>Black (BK)</b>
Shrink Ratio	<b>3:1, 4:1</b>
Longitudinal change after shrinkage	<b>-10% max.</b>
Min. Shrink Temperature	<b>+120 °C</b>
Operating Temperature	<b>-55 °C to +110 °C</b>
Dielectric Strength	<b>15 kV/mm according to IEC 684 P2</b>
Flammability	<b>ASTM D 2671 (outer layer only)</b>
Certification	<b>MIL-DTL-23053/4, SAE - AMS - DTL-23053/4</b>



#### Technical Table

Article-No.	Type	Supplied Ø D min.	Recov. Ø d max.	Wall (WT) nom.	Reel Length (m)
<b>EPS-300</b>					
340-06020	<b>EPS-300 6/2</b>	6.0	2.0	1.00	300
340-09030	<b>EPS-300 9/3</b>	9.0	3.0	1.40	150
340-12040	<b>EPS-300 12/4</b>	12.0	4.0	1.80	100
340-19060	<b>EPS-300 19/6</b>	19.0	6.0	2.20	50
340-40130	<b>EPS-300 40/13</b>	40.0	13.0	2.50	25
<b>EPS-400</b>					
341-04010	<b>EPS-400 4/1</b>	4.0	1.0	1.00	300
341-08020	<b>EPS-400 8/2</b>	8.0	2.0	1.00	150
341-12030	<b>EPS-400 12/3</b>	12.0	3.0	1.40	100
341-16040	<b>EPS-400 16/4</b>	16.0	4.0	1.80	100
341-24060	<b>EPS-400 24/6</b>	24.0	6.0	2.20	50
341-32080	<b>EPS-400 32/8</b>	32.0	8.0	2.50	25

All dimensions in mm. Subject to technical changes.



Please note! Not every product listed carries these approvals! For Product Specific Approvals please refer to the Appendix.

